


01.

Derrock FLC 2000/48-30 PWP Shaker Screen Replacement ▼

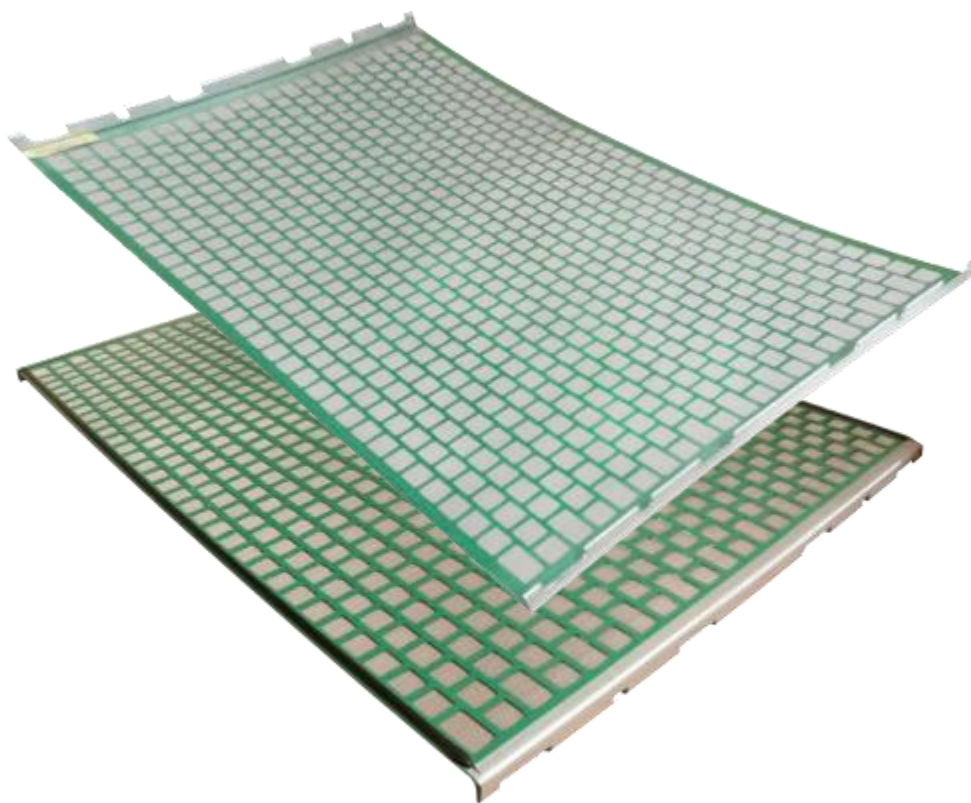

Compatible shale shakers

- Derrock FLC (Flo-Line Cleaner) 2000 3-panel shaker.
- Derrock FLC (Flo-Line Cleaner) 2000 4-panel shaker.
- Derrock FLC (Flo-Line Cleaner) 2000 series mud cleaners.
- Derrock FLC Plus, FLC with AWD, HI-G dryer.

Technical Parameter

- **Model No.:** KET-PWP 2000.
- **Material:** stainless steel 304/316/316 L.
- **Construction Type:** PWP (perforated wear plate).
- **Perforated Mesh Shape:** rectangle/hexagonal.
- **Standard:** API RP 13C.
- **API RP 13C Designation:** API 120 – API 400.
- **Series:** DX, DF, HP optional.
- **Warranty Period:** 1 year.



Positive Side



SS 304/316 Wire Mesh Cloth




Reverse Side



Rectangular Perforated
Wear Plate

KET-PWP 2000-A325

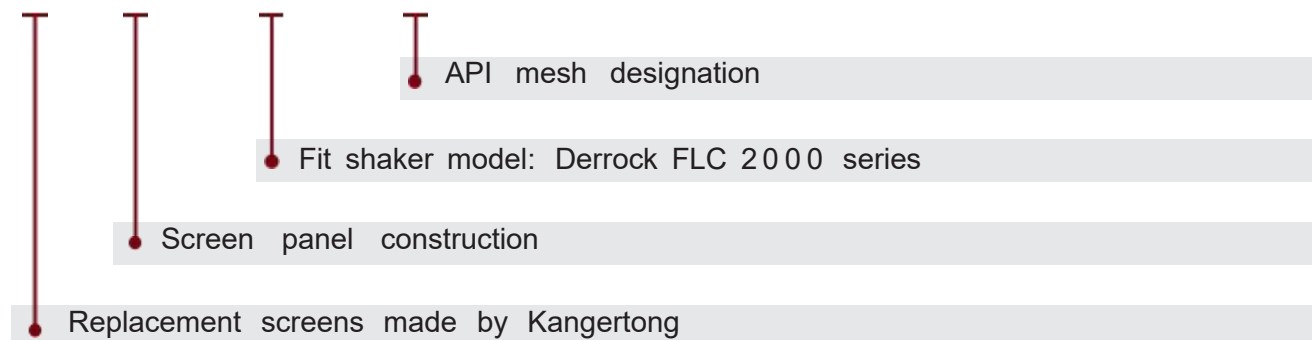

Performance Parameter

Screen Designation	Mesh Type	API RP 13C Designation	Conductance Number	D100 Separation (microns)	Layer No.	Non-Blank Area (sq.ft)
KET-PWP 2000-A325	DF	API 325	0.29	44	2/3	5.3
KET-PWP 2000-A270	DF	API 270	0.31	57	2/3	5.3
KET-PWP 2000-A230	DF	API 230	0.59	68	2/3	5.3
KET-PWP 2000-A200	DX	API 200	0.73	73	2/3	5.3
KET-PWP 2000-A170	DX	API 170	0.85	83	2/3	5.3
KET-PWP 2000-A140	DX	API 140	1.43	101	2/3	5.3
KET-PWP 2000-A120	DX	API 120	1.46	134	2/3	5.3
KET-PWP 2000-A100	DX	API 100	1.8	164	2/3	5.3
KET-PWP 2000-A80	DX	API 80	2.48	193	2/3	5.3
KET-PWP 2000-A70	DX	API 70	2.67	203	2/3	5.3
KET-PWP 2000-A60	DX	API 60	3.56	268	2/3	5.3
KET-PWP 2000-A50	DX	API 50	4.19	285	2/3	5.3
KET-PWP 2000-A40	DX	API 40	6.77	439	2/3	5.3
KET-PWP 2000-A35	DX	API 35	7.24	538	2/3	5.3
KET-PWP 2000-A20	DF	API 20	14.35	809	2/3	5.3

* D100: Particles this size and larger will normally be discarded.

* API: Corresponding API sieve equivalent as per API RP 13C.

* Conductance No.: This represents the ease with which a liquid can flow through the screen. Larger values represent higher volume handling.